


SHIFT

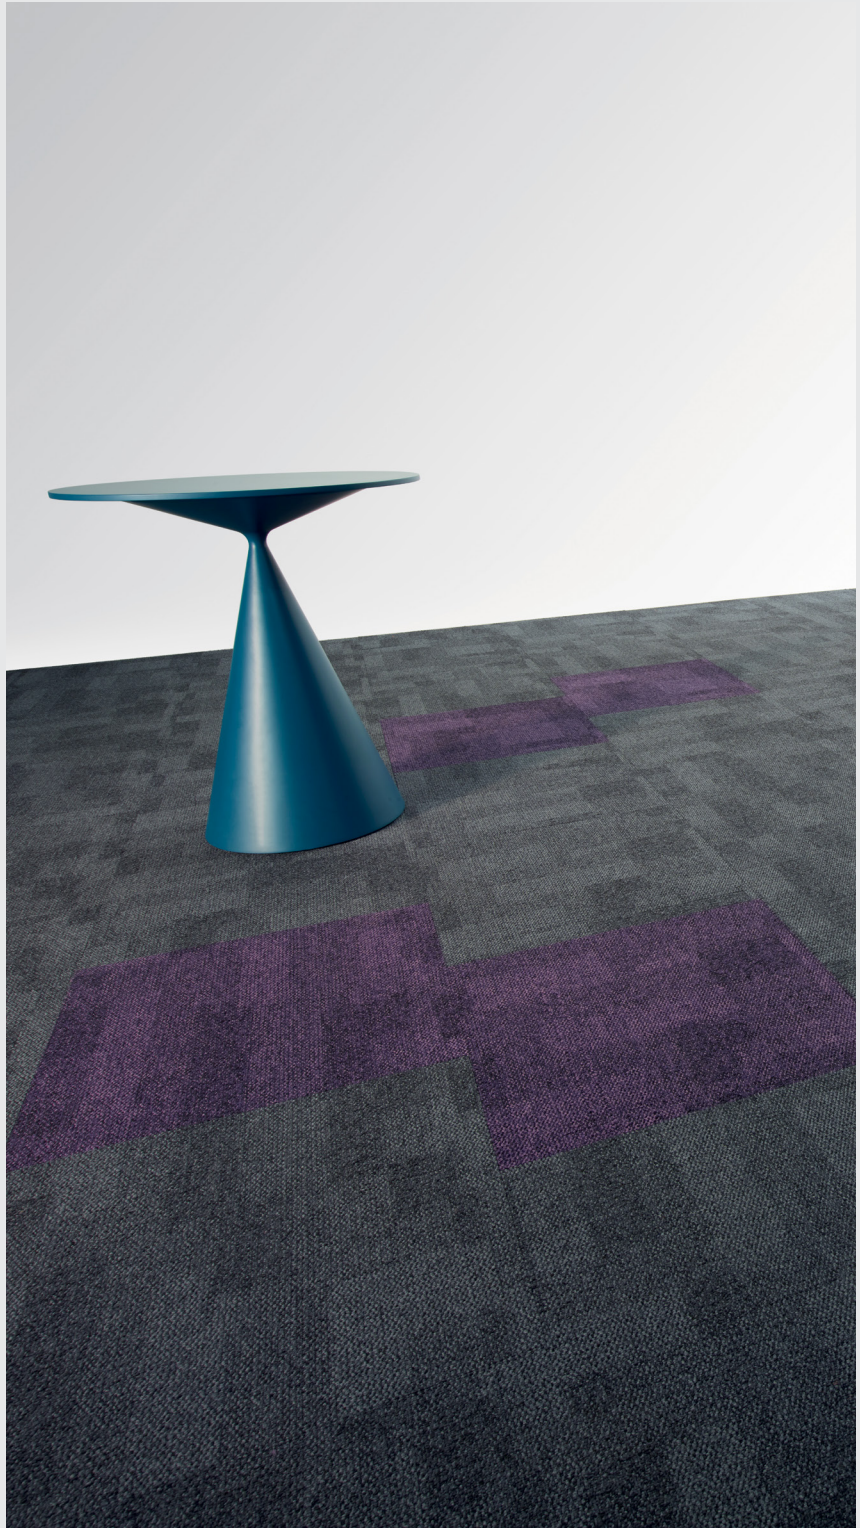


SHIFT ADJUST 1417, DEFLECT 3366

au 1800 150 554
nz 0800 150 555
signaturefloors.com.au
signaturefloors.co.nz

Signature


SHIFT




REVITALISE
8242 | 8242CB



REVISE
5315 | 5315CB




REFRESH
5459 | 5459CB




RESTORE
2261 | 2261CB




RENEW
3586 | 3586CB




RESHAPE
2335 | 2335CB




INNOVATE
8948 | 8948CB




RENOVATE
8902 | 8902CB




SWITCH
4594 | 4594CB




VARIATION
4672 | 4672CB




DEFINE
7147 | 7147CB



TURN
9447 | 9447CB



REFORM
2131 | 2131CB




MOVE
0419 | 0419CB



TRANSFER
4067 | 4067CB




ROTATE
6712 | 6712CB




REVAMP
1940 | 1940CB




AMEND
1675 | 1675CB



DEFLECT
3366 | 3366CB



REMODEL
3365 | 3365CB




CHANGE
6074 | 6074CB




DEVIATE
6062 | 6062CB




ALTER
1700 | 1700CB



ADAPT
1799 | 1799CB




CAPTURE
0099 | 0099CB



CONVERT
9975 | 9975CB



ADJUST
1417 | 1417CB



DEVELOP
9800 | 9800CB



MODIFY
1007 | 1007CB



DISTORT
0775 | 0775CB

SHIFT



PROJECT: TXU OFFICE
SHIFT RENOVATE 8902


SPECIFICATIONS

Product	Shift
Product Category	Carpet Tile
Construction	Multi-level Loop
Yarn/Fibre	Solution Dyed Nylon
Pile Weight	646g/m ² (19oz)
Pile Height	4mm
Gauge	1/10
Tile Size	500 x 500mm
Total Thickness	7.0mm Thermo Bak [®] 9.5mm Comfi Bak [®]
Total Weight	5.0kg/m ² Thermo Bak [®] 4.2kg/m ² Comfi Bak [®]
Carton Size	5m ²

CUSTOM OPTIONS

Thermo Bak[®]	In stock
Comfi Bak[®]	In stock
Flexi Bak[®]	50m ² minimum
Shapes by Signature[®]	50m ² minimum

INSTALLATION METHODS



PERFORMANCE

Dimensional Stability	<0.15%
Backing	Thermo Bak [®] Comfi Bak [®]
Electrostatic Propensity	<3.0kv
Recommended Adhesive	RLA Polymers GS300
ACCS Rating	Commercial Extra Heavy Duty
Warranty	15 Year
Fire Rating ISO 9239.1	6.5kw/m ² Critical Radiant Flux (Thermo Bak [®]) 9.0kw/m ² Critical Radiant Flux (Comfi Bak [®]) Suitable all areas

Stain/Soil Ultra Gard

SUSTAINABILITY

GreenTag[®] GreenRate Level A
EPDs And Declare Labels
WELL & LBC Eligible

TECHNICAL DOCUMENTS

[Technical Information Guide](#)
[Care and Maintenance Guide](#)
[Warranty Guide](#)

Our manufacturing process ensures no two tiles are the same. Please note that there may be batch variations from different dye lots.

