

FUSION PLANKS
COMPOUND



COMPOUND LEAD AQUA 2-021-031PL, CARBON SAND 1-007-099PL




au 1800 150 554
nz 0800 150 555
signaturefloors.com.au
signaturefloors.co.nz

Signature




COMPOUND

FUSION PLANKS




ZINC

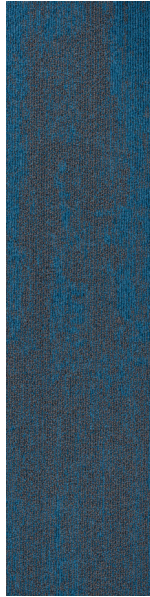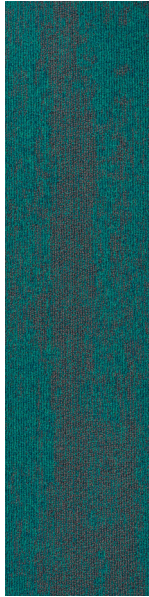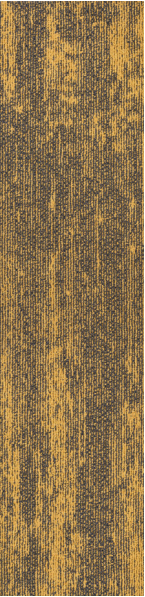

LEAD

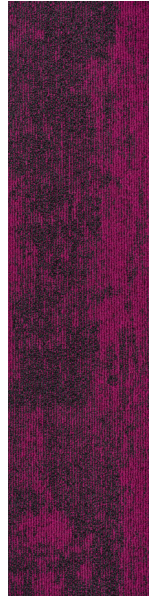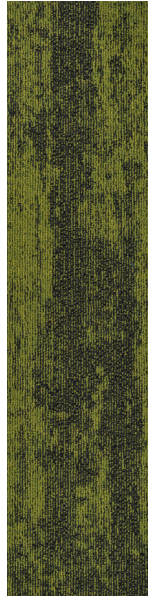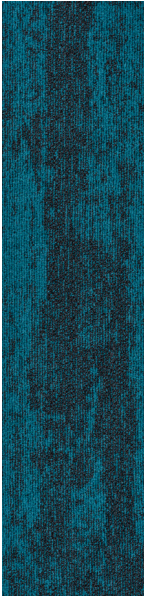

CARBON

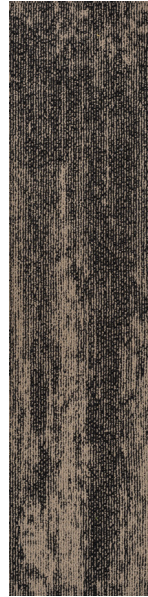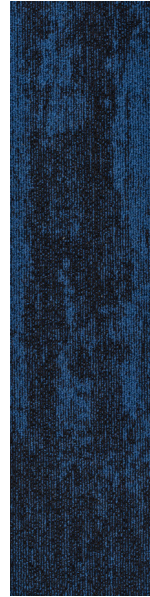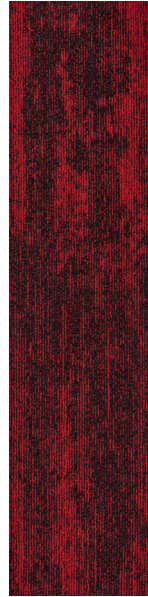

ZINC
YELLOW
6-082-003PL

ZINC
TEAL
6-046-021PL

ZINC
AZURE
6-040-036PL

LEAD
AQUA
2-021-031PL

LEAD
GREEN
2-048-002PL

LEAD
MAGENTA
2-060-062PL

CARBON
RED
1-023-035PL

CARBON
NAVY
1-019-040PL

CARBON
SAND
1-007-099PL

SPECIFICATIONS

Collection	Fusion Planks
Product	Compound
Product Category	Carpet Plank
Construction	Multi-level Loop
Yarn/Fibre	Solution Dyed Nylon
Pile Weight	646g/m ² (19oz)
Pile Height	4mm
Gauge	1/12
Tile Size	250mm x 1000mm
Total Thickness	6.5mm
Total Weight	4.65kg/m ²
Carton Size	5m ²

CUSTOM OPTIONS

Thermo Bak[®]	In stock
Flexi Bak[®]	50m ² minimum
Comfi Bak[®]	50m ² minimum
Shapes by Signature[®]	50m ² minimum

INSTALLATION METHODS



BRICK



BASKETWEAVE



ASHLAR



HERRINGBONE

PERFORMANCE

Dimensional Stability	<0.15%
Backing	Thermo Bak [®]
Electrostatic Propensity	<2.0kv
Recommended Adhesive	RLA Polymers GS300
ACCS Rating	Commercial Extra Heavy Duty
Warranty	15 Year Limited
Fire Rating ISO 9239.1	4.5kw/m ² Critical Radiant Flux Suitable all areas
Stain/Soil	Ultra Gard

SUSTAINABILITY

GreenTag[®] GreenRate Level A
Declare Labels
WELL & LBC Eligible

TECHNICAL DOCUMENTS

[Technical Information Guide](#)
[Care and Maintenance Guide](#)
[Warranty Guide](#)

Our manufacturing process ensures no two planks are the same. Please note that there may be batch variations from different dye lots.