

STATIC




Dynamo 191-185CB

au 1800 150 554  
nz 0800 150 555  
[signaturefloors.com.au](http://signaturefloors.com.au)  
[signaturefloors.co.nz](http://signaturefloors.co.nz)


*Signature*




STATIC




**Resolution**  
082-042CB



**Hertz**  
175-181CB



**Ember**  
054-191CB




**Flux**  
172-111CB




**Matrix**  
085-136CB




**Dynamo**  
191-185CB




**Cipher**  
002-124CB




**Glitch**  
048-114CB




**Encode**  
114-095CB




**Genesis**  
143-010CB



**Shutter**  
046-072CB




**Shake**  
021-031CB




**Byte**  
012-071CB



**Capture**  
067-012CB




**Data**  
019-040CB




**Pulse**  
113-134CB



**Compute**  
017-099CB




**Ingot**  
017-000CB



**Waveform**  
197-999CB



**Zephyr**  
202-999CB



**Surge**  
999-098CB



**Ripple**  
100-098CB




**Fragment**  
098-000CB



**Numerical**  
014-017CB



**Vortex**  
196-007CB



**Infinity**  
099-007CB



**Reverb**  
097-099CB



**Particle**  
010-007CB



**Voltage**  
075-007CB



**Balance**  
099-075CB



**Apex**  
999-003CB



**Relay**  
007-999CB



**Spectrum**  
197-003CB



STATIC



Vortex 196-007CB, Genesis 143-010CB, Glitch 048-114CB


**SPECIFICATIONS**

<b>Product</b>	Static
<b>Product Category</b>	Carpet Tiles
<b>Construction</b>	Multi-level Loop
<b>Yarn/Fibre</b>	Solution Dyed Nylon
<b>Pile Weight</b>	646g/m <sup>2</sup> (19oz)
<b>Pile Height</b>	4mm
<b>Gauge</b>	1/10
<b>Tile Size</b>	500 x 500mm
<b>Total Thickness</b>	9.5mm
<b>Total Weight</b>	4.2kg/m <sup>2</sup>
<b>Carton Size</b>	5m <sup>2</sup>

**CUSTOM OPTIONS**

<b>Comfi Bak<sup>®</sup></b>	In stock
<b>Flexi Bak<sup>®</sup></b>	50m <sup>2</sup> minimum
<b>Thermo Bak<sup>®</sup></b>	50m <sup>2</sup> minimum
<b>Shapes by Signature<sup>®</sup></b>	50m <sup>2</sup> minimum

**INSTALLATION METHODS**

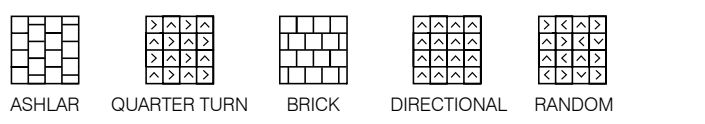

**PERFORMANCE**

<b>Dimensional Stability</b>	<0.15%
<b>Backing</b>	Comfi Bak <sup>®</sup>
<b>Electrostatic Propensity</b>	<3.0kv
<b>Recommended Adhesive</b>	RLA Polymers GS300
<b>ACCS Rating</b>	Commercial Extra Heavy Duty
<b>Warranty</b>	15 Year
<b>Fire Rating ISO 9239.1</b>	4.8kw/m <sup>2</sup> Critical Radiant Flux Suitable all areas
<b>Stain/Soil</b>	Ultra Gard

**SUSTAINABILITY**

GreenTag<sup>®</sup> GreenRate Level A  
 EPDs And Declare Labels  
 WELL & LBC Eligible

**TECHNICAL DOCUMENTS**

Technical Information Guide  
 Care and Maintenance Guide  
 Warranty Guide

Our manufacturing process ensures no two tiles are the same. Please note that there may be batch variations from different dye lots.

